


1N5391 THRU 1N5399

1.5 AMPS.SILICON RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
1.5 Amperes

DO-15

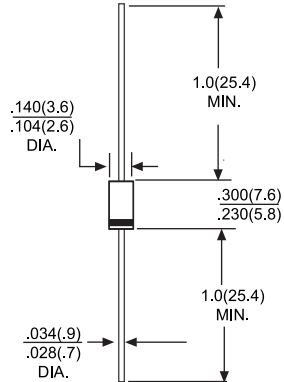

Dimensions in inches and (millimeters)

Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Cases: Molded plastic
- Epoxy: UL 94V-O rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- High temperature soldering guaranteed:
250°C/10 seconds/.375"(.9.5mm) lead
lengths at 5 lbs.(2.3kg) tension
- Weight: 0.40 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		1N 5391	1N 5392	1N 5393	1N 5395	1N 5397	1N 5398	1N 5399	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @T _A = 75°C	I _{F(AV)}	1.5							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50							A
Maximum Instantaneous Forward Voltage @1.5A	V _F	1.1	1.0						V
Maximum DC Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 125°C	I _R					5.0 50			µA µA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @T _L =75°C	I _R					30			µA
Typical Junction Capacitance (Note 1)	C _J					30			pF
Typical Thermal Resistance (Note 2)	R _{θJA}					50			°C/W
Operating Temperature Range	T _J					-55 to +125			°C
Storage Temperature Range	T _{STG}					-55 to +150			°C

NOTES: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
2. Thermal Resistance from Junction to Ambient .375"(9.5mm) Lead Length.

RATING AND CHARACTERISTIC CURVES

1N5391 THRU 1N5399

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

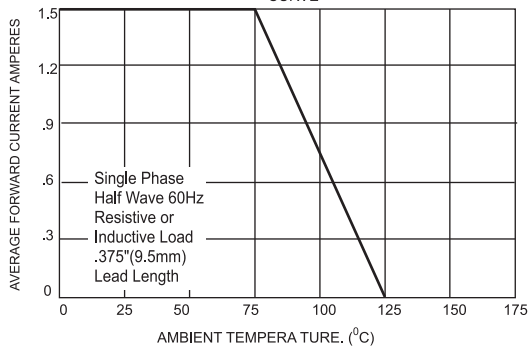


FIG.2- TYPICAL FORWARD CHARACTERISTICS

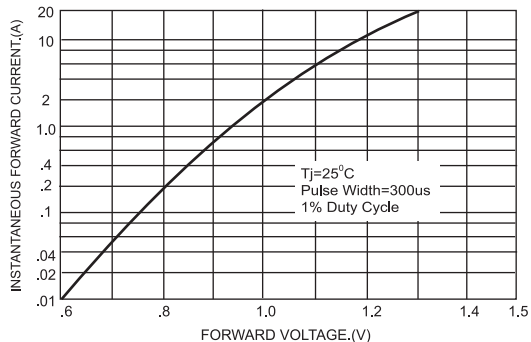


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

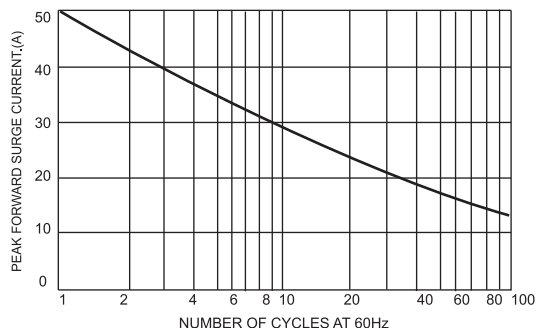


FIG.4-TYPICAL REVERSE CHARACTERISTICS

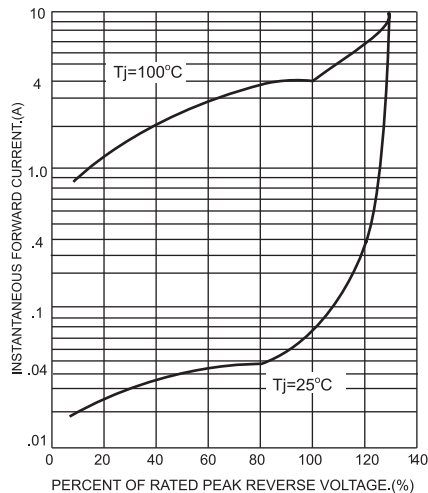


FIG.5- TYPICAL JUNCTION CAPACITANCE

